



**693+**




The double deck Terex Finlay 693+ has been designed and developed to fulfill the demands of today's high production producer. The double deck screen configuration provides two full sized 6.1m x 1.53m (20' x 5') screen decks. A high capacity belt feed hopper is available with remote tipping grid or double deck vibrating grid. Impressive features include hydraulic tipping reject grid complete with grouser bars, three on-board hydraulic folding conveyors and low level greasing access points.

Now available with dual power technology option. On-board electrical motors allow flexibility to run from an outside power supply or standard on-board engine.

### KEY FEATURES

- The double deck 6.1m x 1.53m (20' x 5') screen box with full catwalk access is the largest and most accessible in it's class.
- A combination of quick wedge tensioning on the top deck and hydraulic tensioning on the bottom deck ensure mesh set up and change out times are kept to an absolute minimum.
- Maximum utilisation of the 6.1m x 1.53m (20' x 5') decks provide ultra-efficient screening capacities even at small aggregate sizes.
- Screen box angle can be hydraulically adjusted to an angle between 18° and 30°.

### TRANSPORT & WORKING

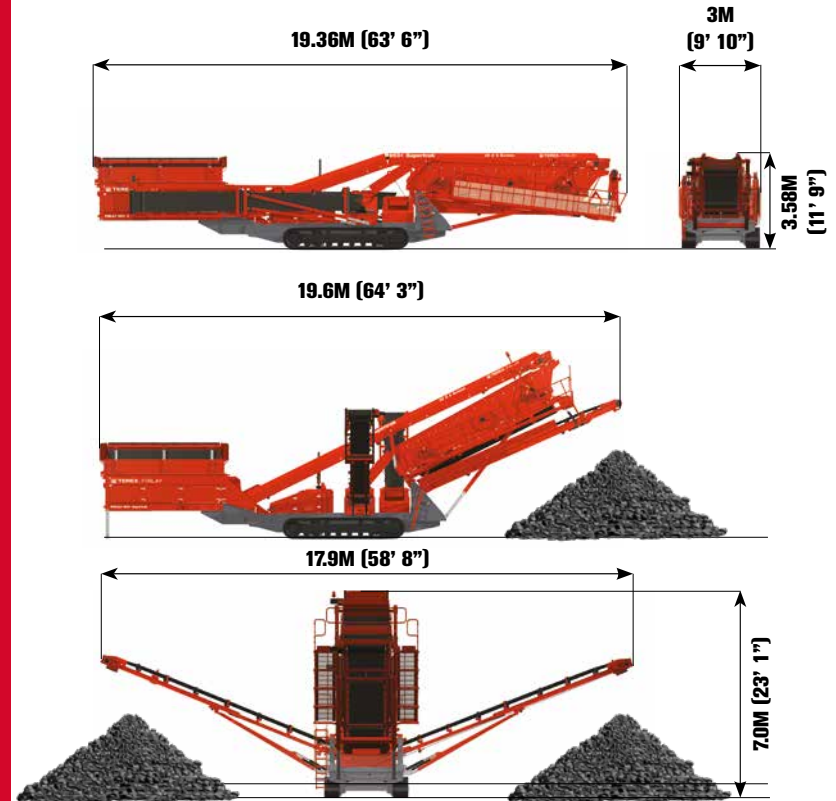

### WEIGHT

**34,850KG (76,831LBS)  
WITH TIPPING GRID**

